


1N 4148 SILICON EPITAXIAL PLANAR DIODE


Silicon Epitaxial Planar Diode

fast switching diode.

This diode is also available in MiniMELF case with the type designation LL4148.



Glass case JEDEC DO-35




Glass case JEDEC DO-34

Dimensions in mm

zakazplat.ru

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

	Symbol	Value	Unit
Reverse Voltage	V_R	75	V
Peak Reverse Voltage	V_{RM}	100	V
Rectified Current (Average) Half Wave Rectification with Resist. Load at $T_{amb} = 25\text{ }^\circ\text{C}$ and $f \geq 50\text{ Hz}$	I_o	150 ¹⁾	mA
Surge Forward Current at $t < 1\text{ s}$ and $T_j = 25\text{ }^\circ\text{C}$	I_{FSM}	500	mA
Power Dissipation at $T_{amb} = 25\text{ }^\circ\text{C}$	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_j	200	$^\circ\text{C}$
Storage Temperature Range	T_s	-65 to + 200	$^\circ\text{C}$
¹⁾ Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature			



SEMTECH ELECTRONICS LTD.

(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)




1N 4148 SILICON EPITAXIAL PLANAR DIODE


Characteristics at $T_j = 25\text{ }^\circ\text{C}$

	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage at $I_F = 10\text{ mA}$	V_F	-	-	1	V
Leakage Current at $V_R = 20\text{ V}$ at $V_R = 75\text{ V}$ at $V_R = 20\text{ V}, T_j = 150\text{ }^\circ\text{C}$	I_{R1} I_{R2} I_{R3}	- - -	- - -	25 5 50	nA μA μA
Reverse Breakdown Voltage tested with $100\text{ }\mu\text{A}$ Pulses	$V_{(BR)R}$	100	-	-	V
Capacitance at $V_F = V_R = 0$	C_{tot}	-	-	4	pF
Voltage Rise when Switching ON tested with 50 mA Forward Pulses $t_p = 0.1\text{ s}$, Rise Time $< 30\text{ ns}$, $f_p = 5\text{ to }100\text{ kHz}$	V_{fr}	-	-	2.5	V
Reverse Recovery Time from $I_F = 10\text{ mA}$ to $I_R = 1\text{ mA}$, $V_R = 6\text{ V}$, $R_L = 100\text{ }\Omega$,	t_{rr}	-	-	4	ns
Thermal Resistance Junction to Ambient Air	R_{thA}	-	-	0.35 ¹⁾	K/mW
Rectification Efficiency at $f = 100\text{ MHz}$, $V_{RF} = 2\text{ V}$	η_V	0.45	-	-	-

¹⁾ Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature

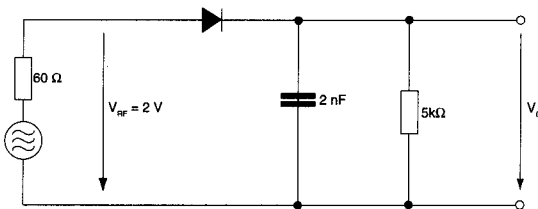

Rectification Efficiency Measurement Circuit








SEMTECH ELECTRONICS LTD.

(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)






1N 4148 SILICON EPITAXIAL PLANAR DIODE

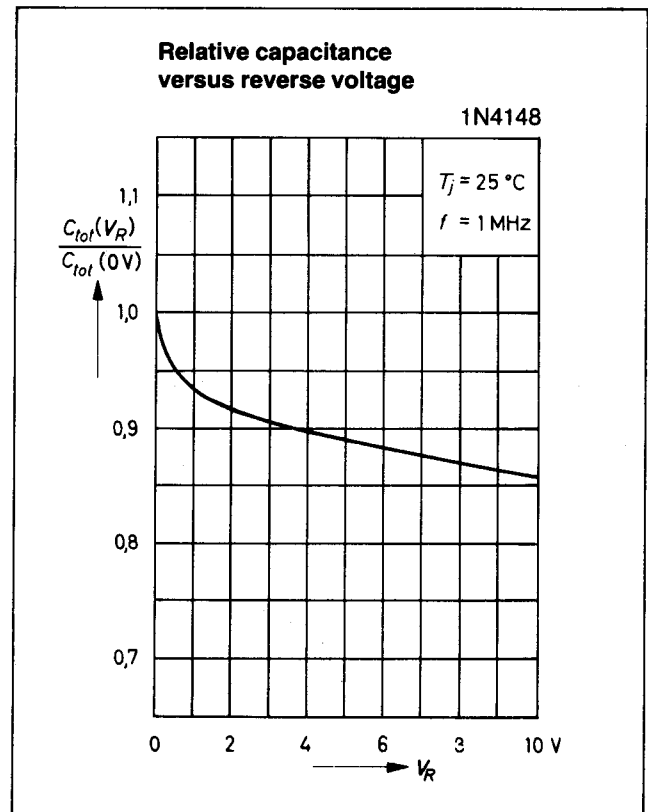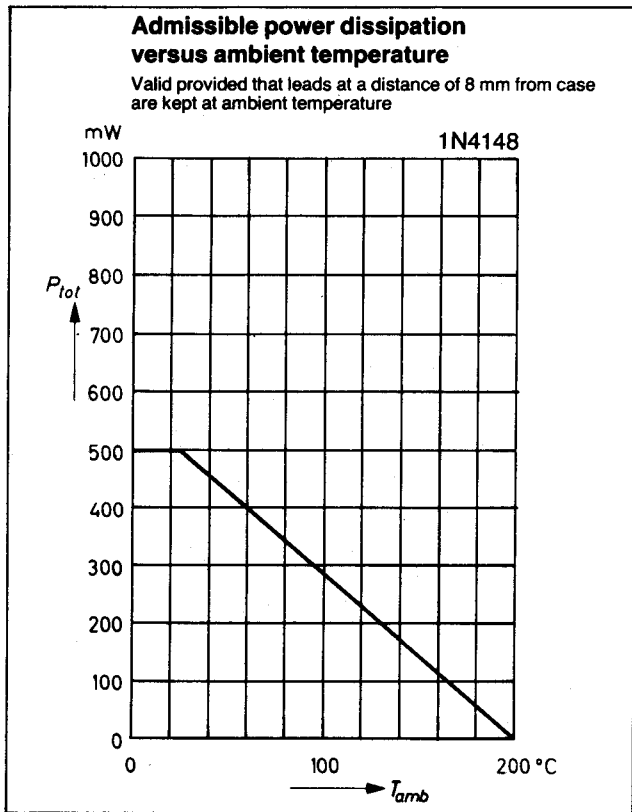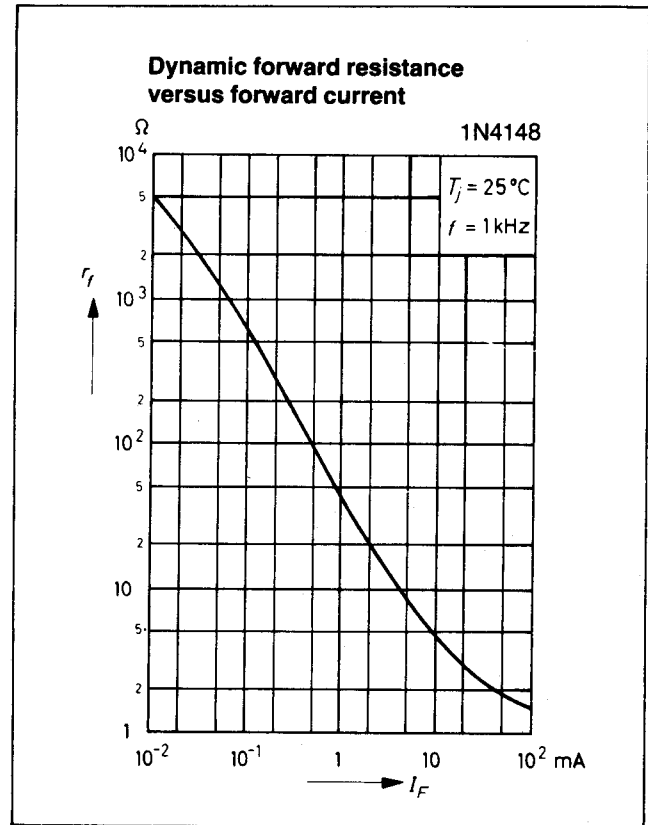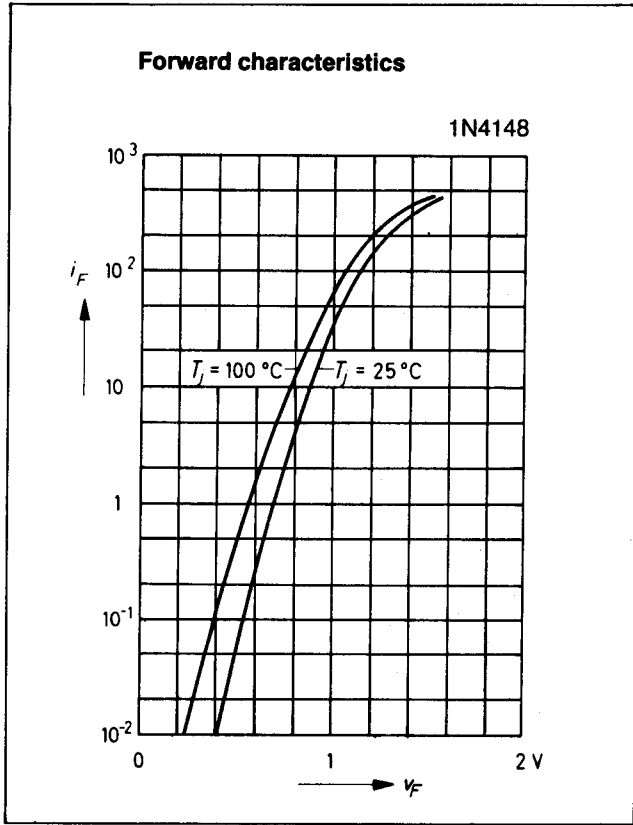

SEMTECH ELECTRONICS LTD.
(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)



1N 4148 SILICON EPITAXIAL PLANAR DIODE

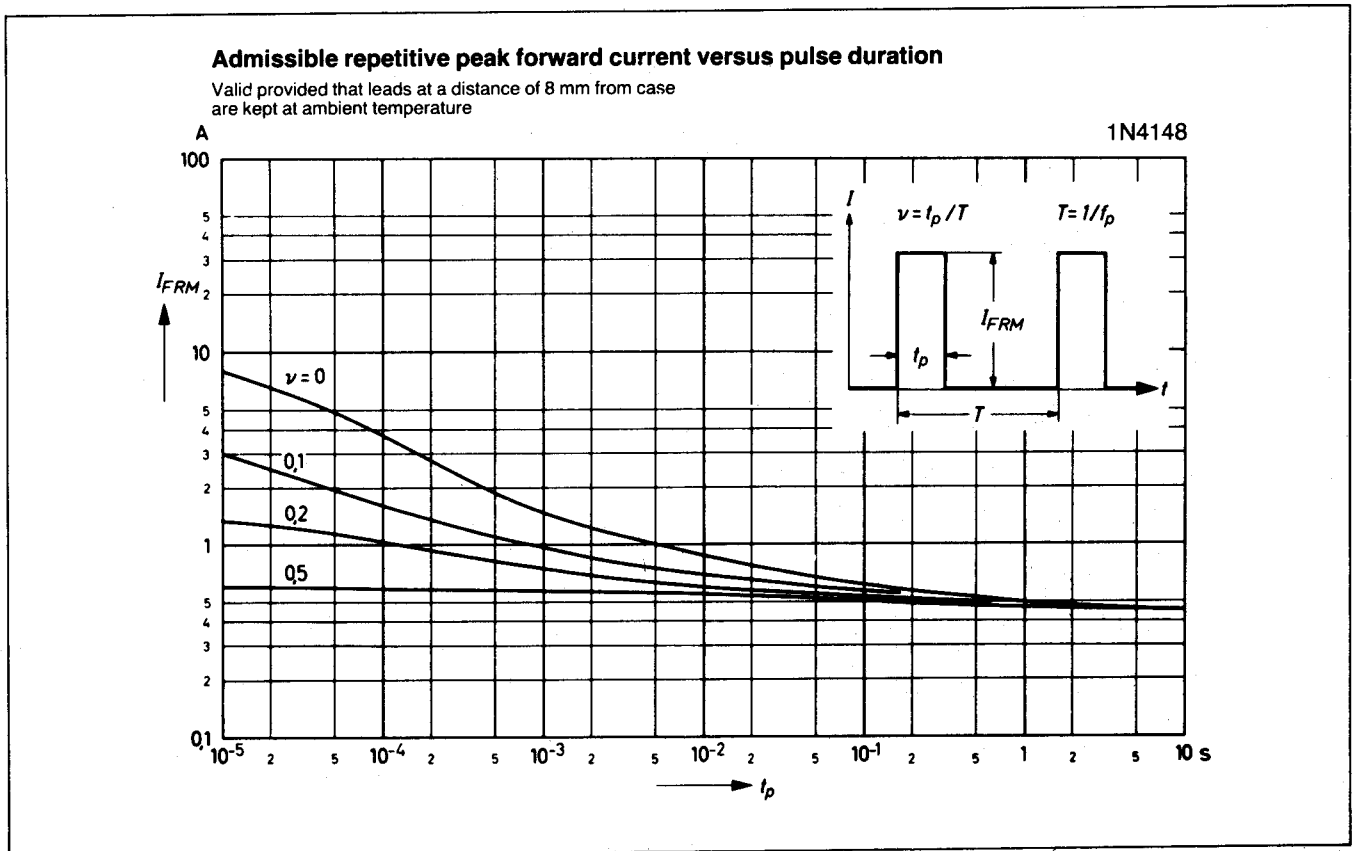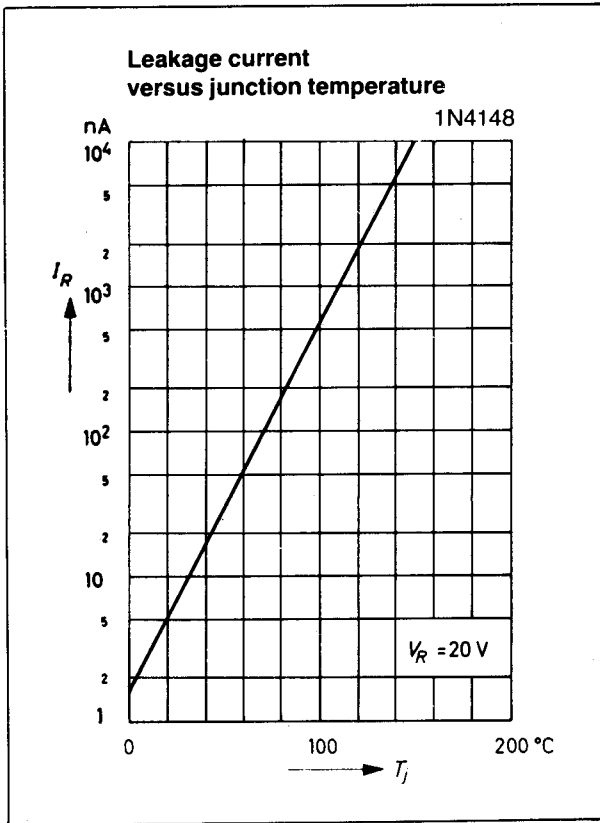

SEMTECH ELECTRONICS LTD.
(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)

