


### FEATURES

- Silicon epitaxial planar diode
- Fast switching diodes
- 500mW power dissipation
- The diode is also available in the Mini-MELF case with the type designation LL4151

### MECHANICAL DATA

- **Case:** DO-35 glass case
- **Polarity:** Color band denotes cathode end
- **Weight:** Approx. 0.13gram

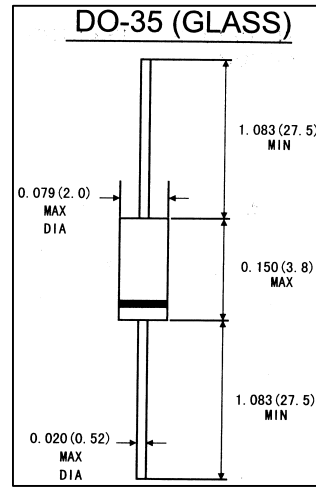

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified)

	Symbol	Value	Units
Reverse voltage	$V_R$	50	Volts
Peak reverse voltage	$V_{RM}$	75	Volts
Average rectified current, Half wave rectification with Resistive load at $T_A=25^\circ\text{C}$ and $F \geq 50\text{Hz}$	$I_{AV}$	150 <sup>1)</sup>	mA
Surge forward current at $t < 1\text{S}$ and $T_J=25^\circ\text{C}$	$I_{FSM}$	500	Ma
Power dissipation at $T_A=25^\circ\text{C}$	$P_{tot}$	500 <sup>1)</sup>	Mw
Junction temperature	$T_J$	175	°C
Storage temperature range	$T_{STG}$	-65 to + 175	°C

1)Valid provided that at a distance of 8mm from case are kept at ambient temperature(DO-35)

### ELECTRICAL CHARACTERISTICS


(Ratings at 25°C ambient temperature unless otherwise specified)

	Symbols	Min.	Typ.	Max.	Units
Forward voltage	$V_F$			1	Volts
Leakage current at $V_R=50\text{V}$	$I_R$			50	nA
at $V_R=20\text{V}$ , $T_J=150^\circ\text{C}$	$I_R$			50	$\mu\text{A}$
Junction capacitance at $V_R=V_F=0\text{V}$	$C_J$	75		2	pF
Reverse breakdown voltage tested with 5 $\mu\text{A}$ pulse	$V_{(BR)R}$				
Reverse recovery time from $I_F=10\text{mA}$ to $I_R=10\text{mA}$ to $I_R=1\text{mA}$ , from $I_F=10\text{mA}$ to $I_R=1\text{mA}$ to $I_R=1\text{mA}$ , $V_R=6\text{V}$ . $R_L=100\ \Omega$	$t_{rr}$ $t_{rr}$			4 4.000	ns ns
Thermal resistance junction to ambient	$R_{\theta JA}$			350 <sup>1)</sup>	K/W
Rectification efficiency at $f=100\text{MHz}$ , $V_{RF}=2\text{V}$	$\eta$	0.45			


1)Valid provided that leads at a distance of 8mm from case are kept at ambient temperature(DO-35)

**RATINGS AND CHATACTERISTIC CURVES 1N4151**


**FIG.1-FORWARD CHARACTERISTICS**

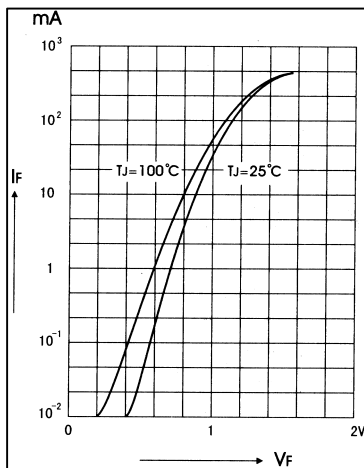


**FIG.2-DYNAMIC FORWARD RESISTANCE VERSUS FORWARD CURRENT**

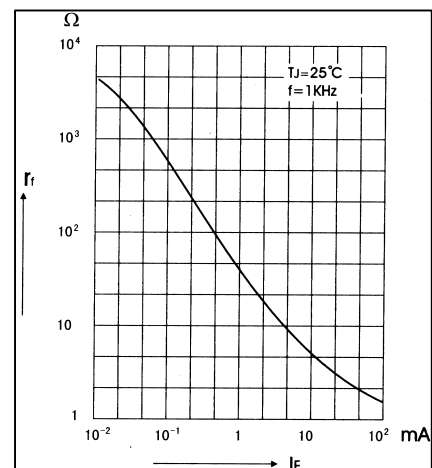


**FIG.3-ADMISSIBLE POWER DISSIPATION VERSUS AMBIENT TEMPERATURE**

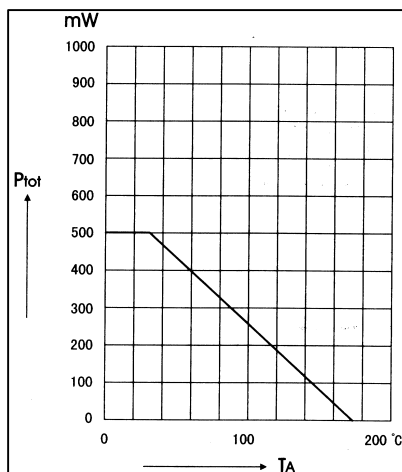


**FIG.4-RELATIVE CAPACITANCE VERSUS VOLTAGE**

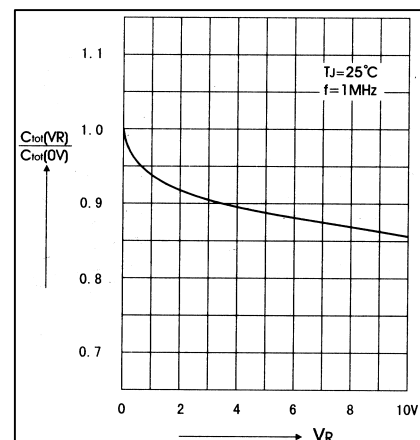

**FIG.5-RECTIFICATION EFFICIENCY MEASUREMENT CIRCUIT**

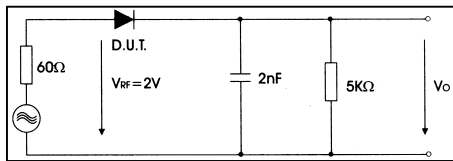

**FIG.6-LEAKAGE CURRENT VERSUS JUNCTION TEMPERATURE**

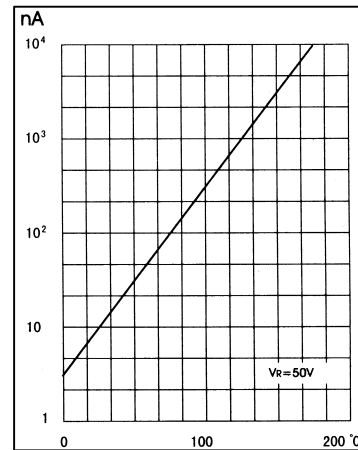

**FIG.7-ADMISSIBLE REPETITIVE PEAK FORWARD CURRENT VERSUS PULSE DURATION**

