


FEATURES

- . Plastic package has Underwriters Laboratory Flammability Classification 94-0
- . Metal silicon junction ,majority carrier conduction
- . Guard ring for overvoltage protection
- . Low power loss,high efficiency
- . High current capability ,Low forward voltage drop
- . High surge capability
- . For use in low voltage ,high frequency inverters, free wheeling , and polarity protection applications
- . High temperature soldering guaranteed: 250°C/10 seconds at terminals,
- . 375"(9.5mm)lead length,5lbs.(2.3kg)tension

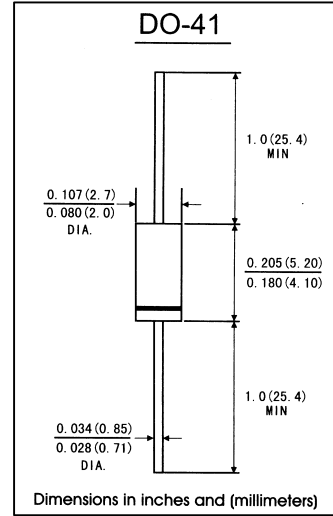

MECHANICAL DATA

- . **Case:** JEDEC MELG DO-41 molded plastic body
- . **Terminals:** Plated axial leads,solderable per MIL-STD-750,method 2026
- . **Polarity:** color band denotes cathode end
- . **Mounting Position:** Any
- . **Weight:** 0.012 ounce, 0.33 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified,Single phase,half wave,resistive or inductive) load. For capacitive load,derate by 20%)

	Symbols	1N5817	1N5818	1N5819	Units
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	Volts
Maximum RMS voltage	V _{RMS}	14	21	28	Volts
Maximum DC blocking voltage	V _{DC}	20	30	40	Volts
Maximum non-repetitive peak reverse voltage	V _{RSM}	24	36	48	Volts
Maximum average forward rectified current 0.375"(9.5mm)lead length at TL=90°C	I(AV)	1.0			Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method) at TL=70°C)	I _{FSM}	25.0			Amps
Maximum instantaneous forward voltage at 1.0 A(Note 1)	V _F	0.450	0.550	0.600	Volts
Maximum instantaneous forward voltage at 3.1 A(Note 1)	V _F	0.750	0.875	0.900	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	TA=25°C	0.5			mA
	TA=100°C	10.0			
Typeical junction capacitance(Note 3)	C _J	110.0			pF
Typeical thermal resistance (Note 2)	R _θ JA	50.0			°C/W
	R _θ JL	15.0			
Operating junction and storage temperature range	T _J /T _{STG}	-65 to +125			°C

- Notes:** 1. Pulse test: 300 μs pulse width,1% duty cycle
 2.Thermal resistance (from junction to ambient)Vertical P.C.B. Mounted, with 1.5X1.5"(38X38mm)copper pads
 3.Measured at 1.0MHz and reverse voltage of 4.0 volts

zakazplat.ru

RATINGS AND CHARACTERISTIC CURVES 1N5817 THRU 1N5819

FIG.1-FORWARD CURRENT DERATING CURVE

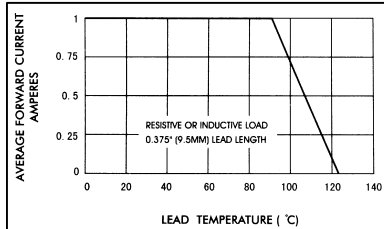


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

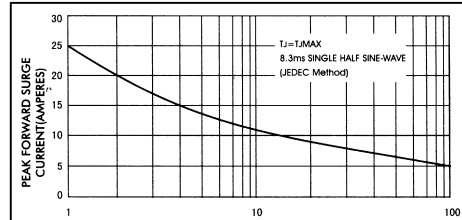


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

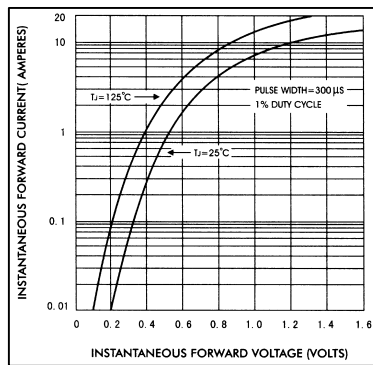


FIG.4-TYPICAL REVERSE CHARACTERISTICS

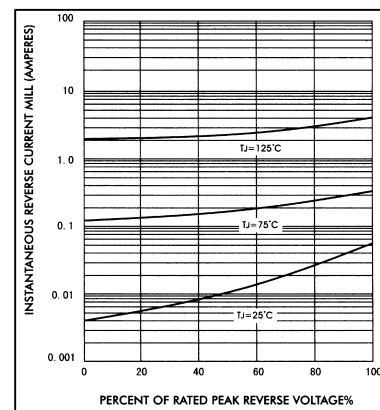


FIG.5-TYPICAL JUNCTION CAPACITANCE

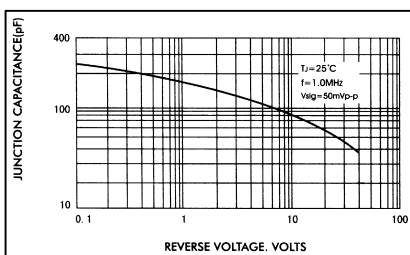


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

